

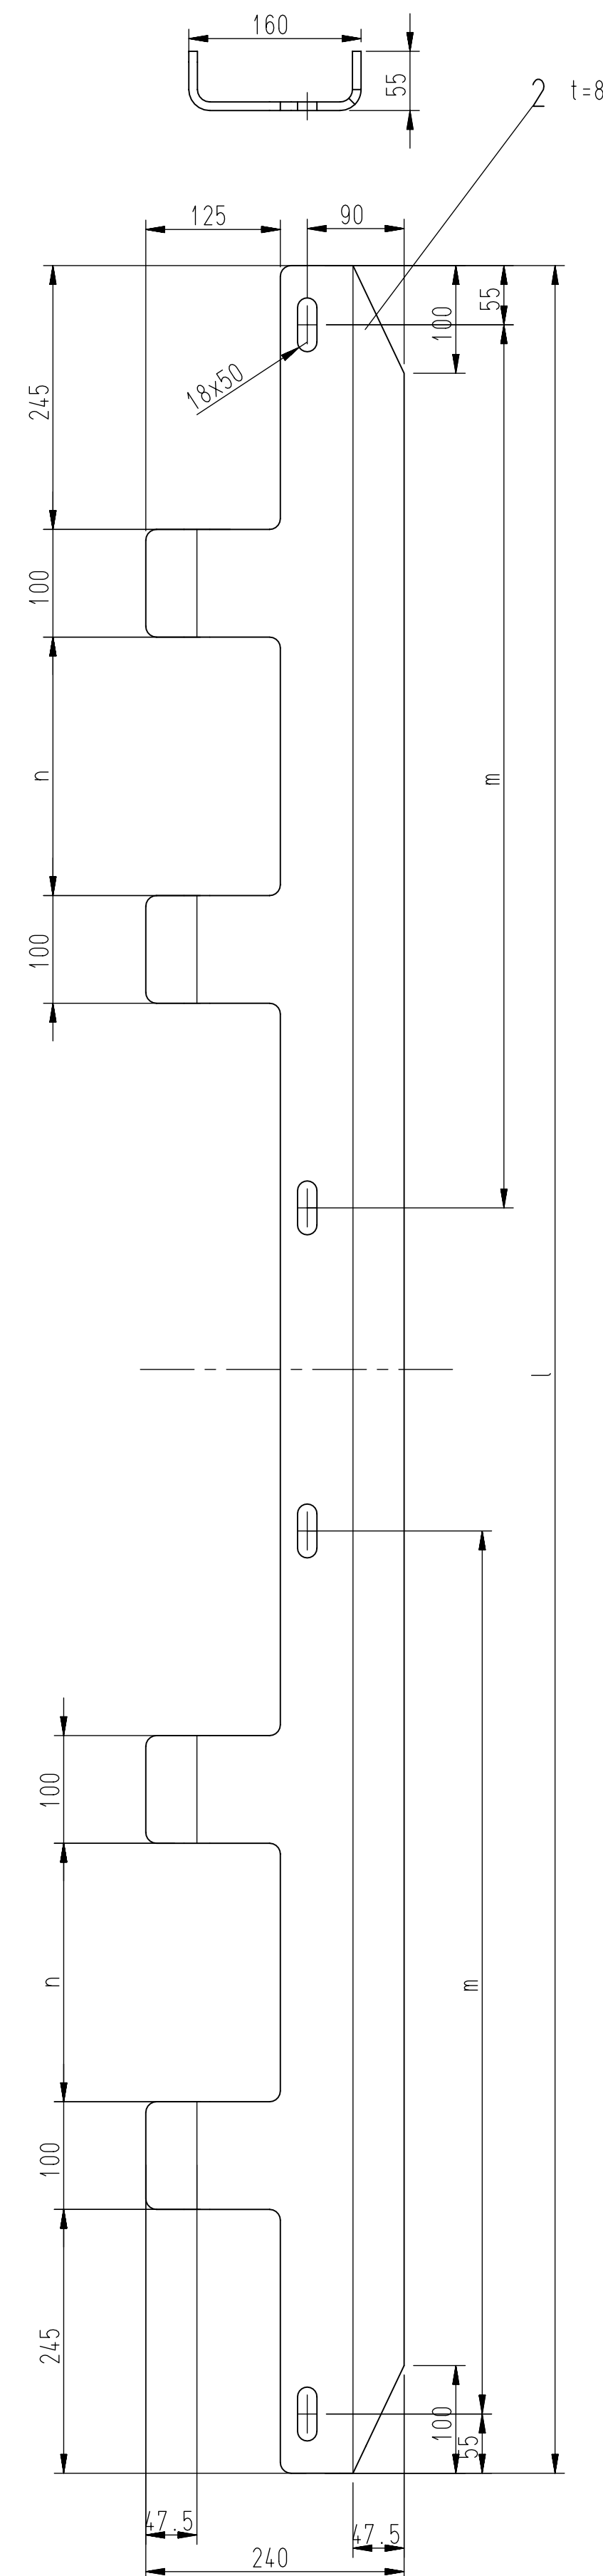
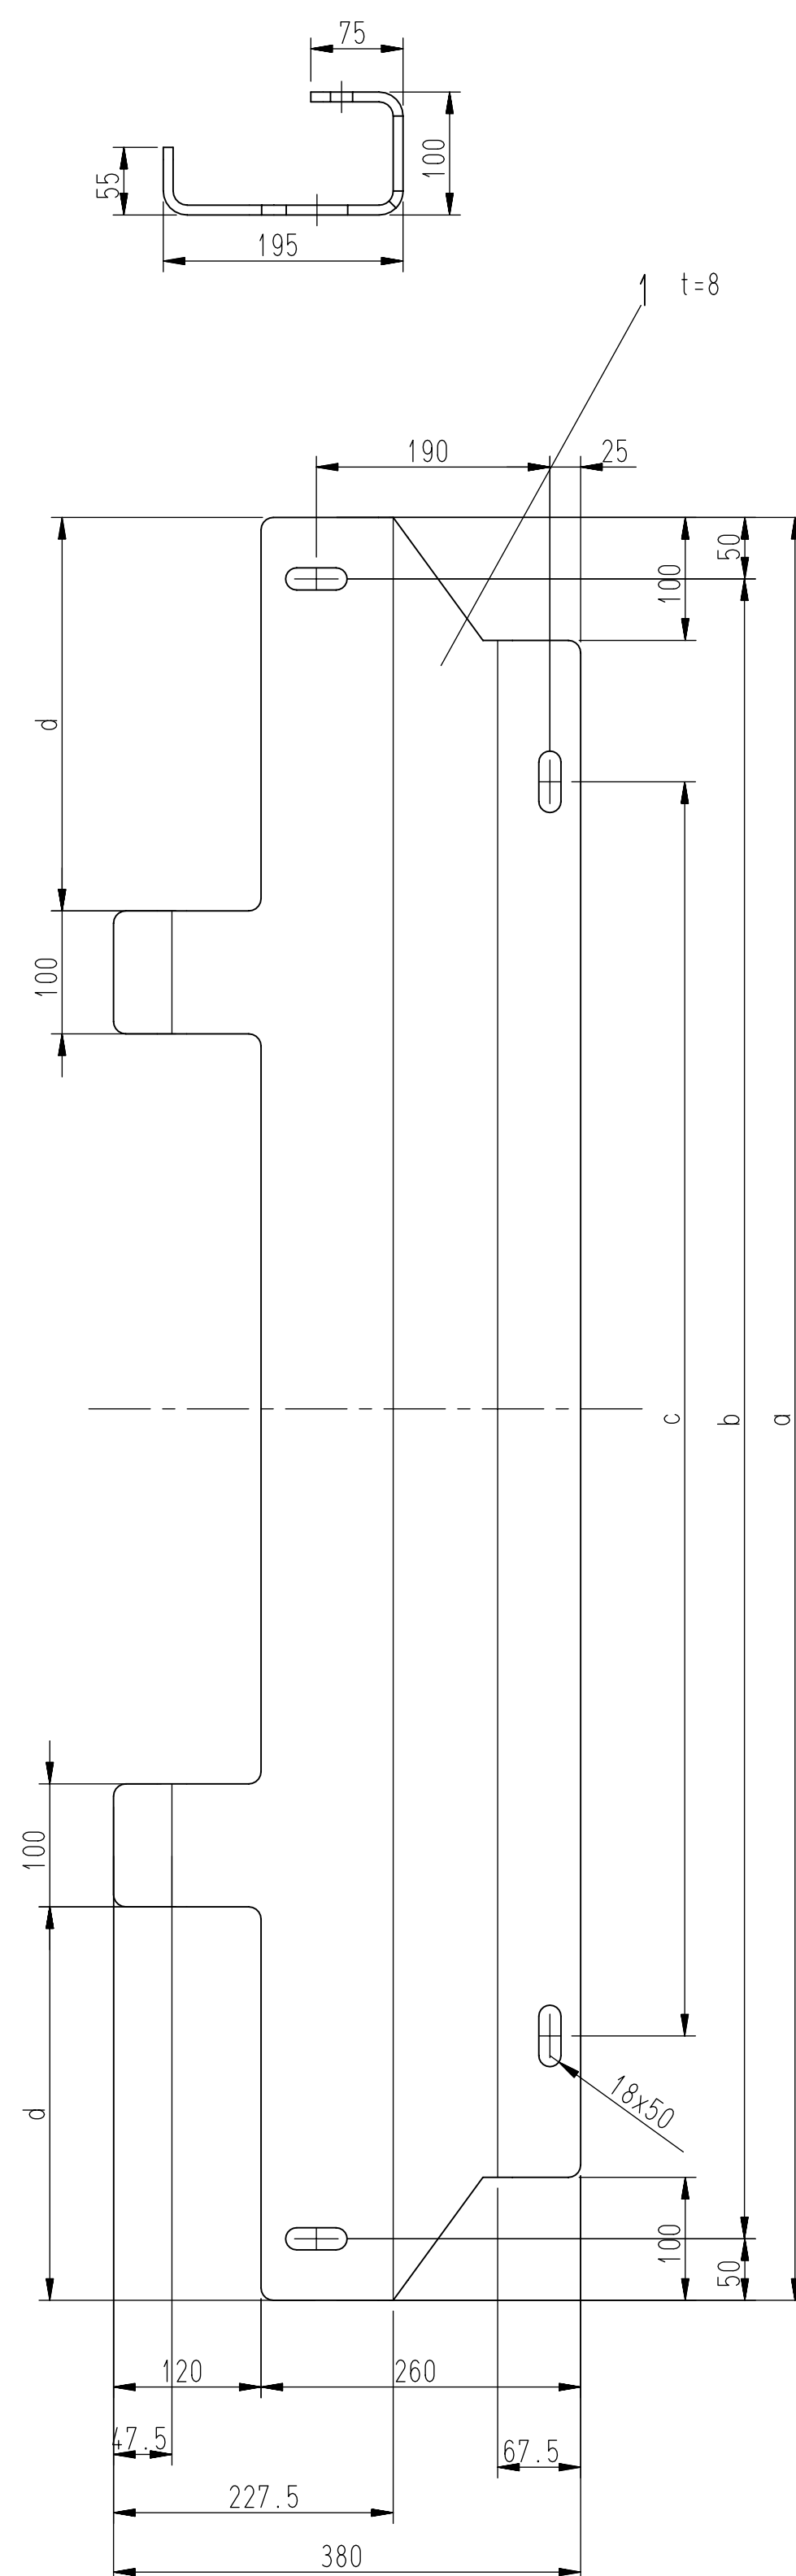


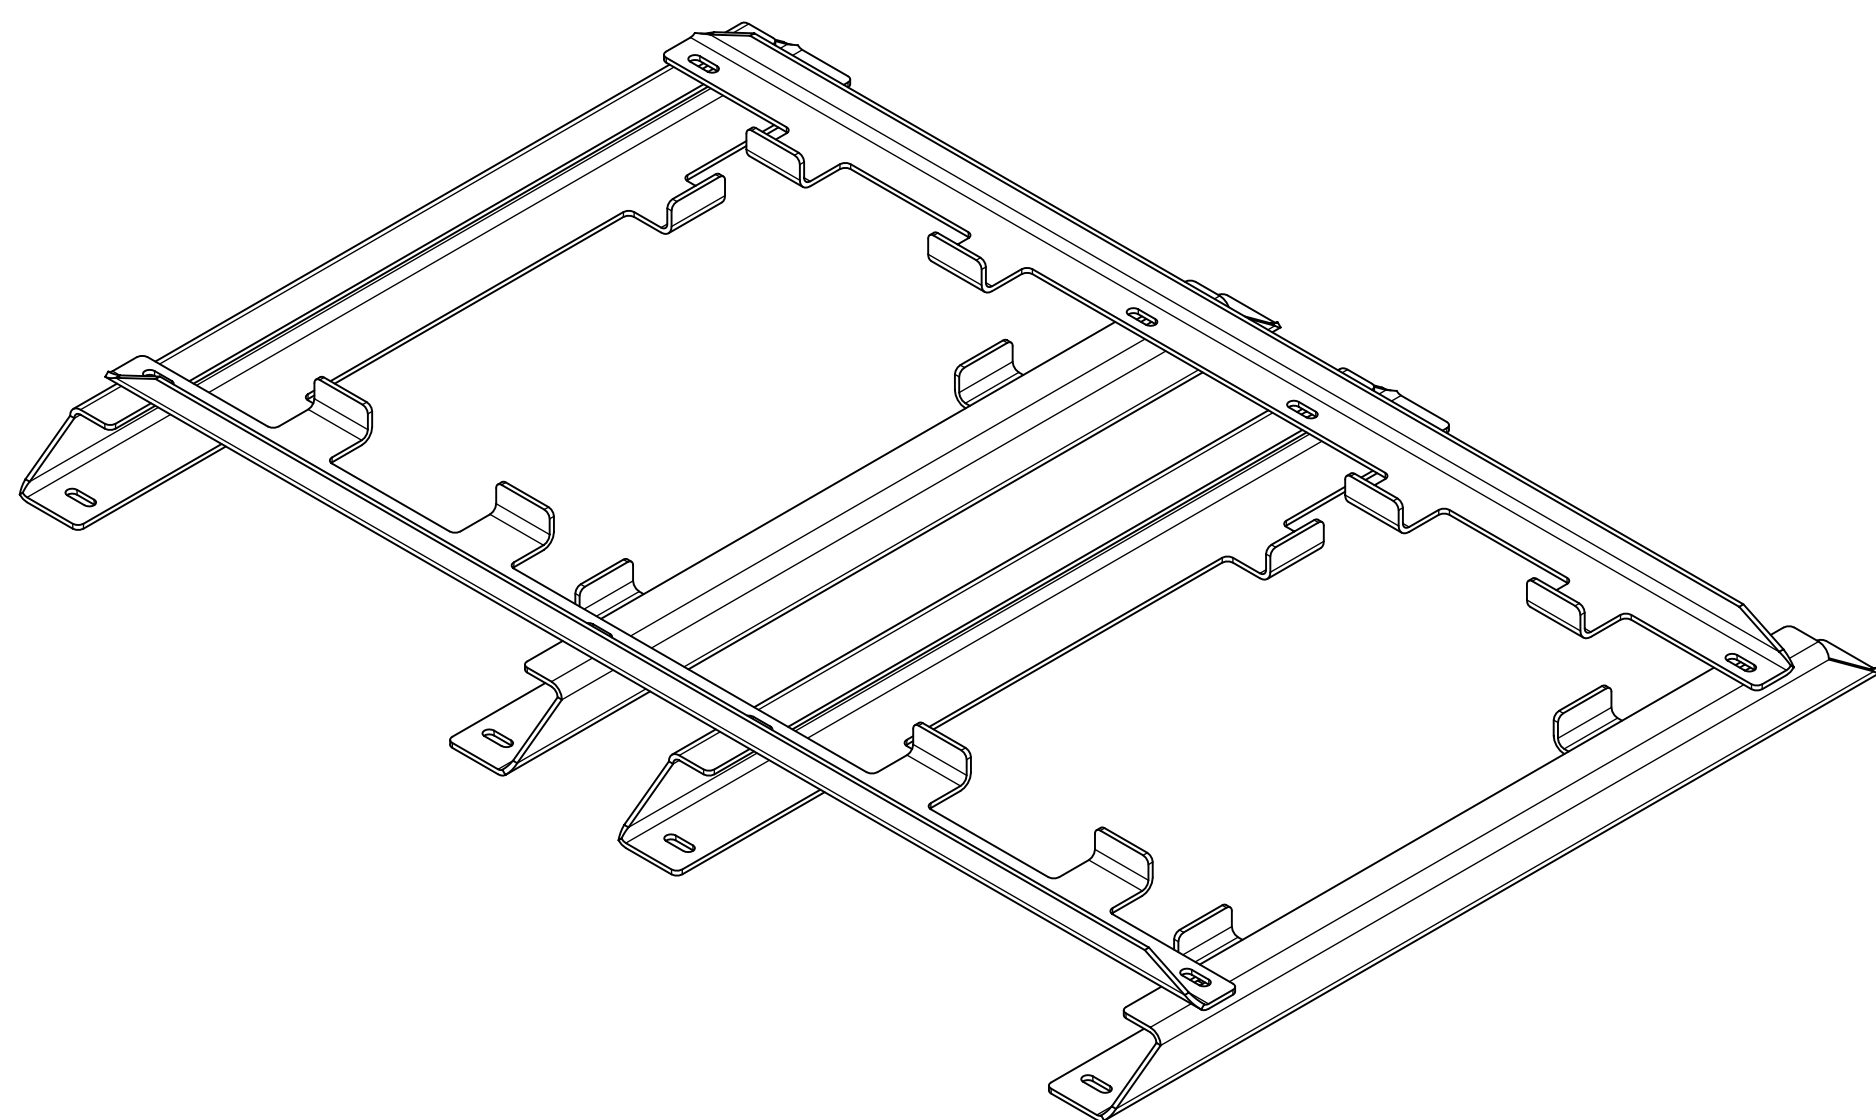

Führungsrahmen guide frame	Pos. 1	BW	400	500	630	800	1000	1250
		Art.-Nr.	322274	322275	322276	322277	322278	322279
		a	1350	1450	1600	1800	2050	2300
		b	1250	1350	1500	1700	1950	2200
		c	920	1020	1150	1320	1570	1820
	Pos. 2	d	315	320	330	345	345	345
		e	1900	2050	2250	2500	2900	2900
		m	790	820	890	960	1040	1040
		n	210	240	310	380	460	460
		L	1500	1650	1850	2100	2500	2500
Schlotmaß dimension of shaft casing		SB	500	530	600	670	750	750
		f	700	800	930	1100	1350	1600
Bohrung in Bühne bore hole in platform	A1		750	780	850	920	1000	1000
	A2		250	340	400	510	750	750

gezeichnet: Führungsrahmen BW500
drawn: guide frame BE500

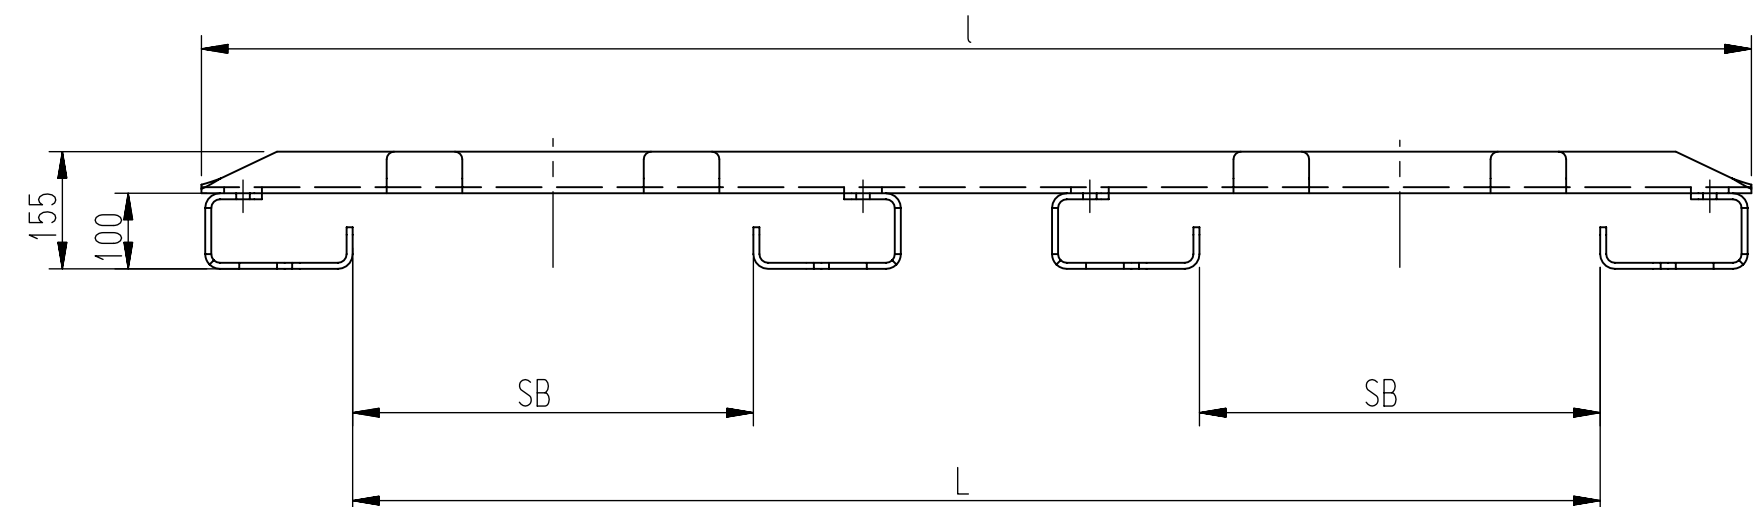